



# **SL-T3535RGBC020-L95 DATA SHEET**

 SPEC. NO.
 : SZ19062101

 DATE
 : 2019/06/21

 REV.
 : A/0

Approved By: Checked By: Prepared By:

Part No.	SL-T3535RGBC020-L95	Page	1 of 9
----------	---------------------	------	--------








### **Features**


- ◆ Pb free product—RoHS compliant
- ♦ Low power consumption, High efficiency
- Reliable and rugged
- ♦ Good mixed light effect
- ♦ Long life solid state reliability
- ♦ Viewing angle: 120°

## **Package Dimension**

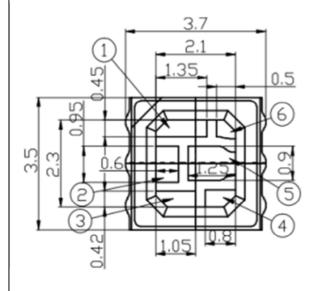

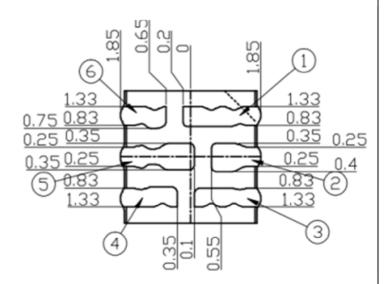

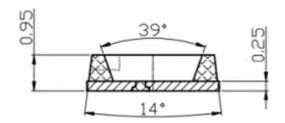



Part NO.	Lens Color	Source Color
SL-T3535RGBC020-L95	Water Clear	Red/Green/Blue

#### **Notes:**

- 1. All dimensions are in millimeters.
- 2. Tolerance is  $\pm 0.10$ mm unless otherwise noted.
- 3. Specifications are subject to change without notice.

Part No.	SL-T3535RGBC020-L95	Page	2 of 9





#### **Absolute Maximum Ratings at Ta=25℃**

Parameter	Red	Green	Blue	Unit
Power Dissipation	48	68	68	mW
Peak Forward Current*2	30	30	30	mA
Continuous Forward Current	20	20	20	mA
Reverse Voltage	5	5	5	V
Electrostatic Discharge (HBM)*3	1000	1000	1000	V
Moisture Sensitivity Level*1		5	ja	
Operating Temperature Range	-35°C to +80°C			
Storage Temperature Range	-35°C to +85°C			
Reflow Temperature	260°C Max. for 10 Seconds Max.			

#### 1. Storage and operating:

- (1). Storage requirements before vacuum bag opened: Temperature<30°C, Humidity<65%RH;
- (2). Check air leakage and vacuum bag damage before opened. If there is any issue found, check the humidity indicator card immediately after bag opened:
  - a. If color changes on "10% circle" of the humidity indicator card only and not the circles of 20% and above, components can be used without additional handling;
  - b. If color changes on both 10% and 20% circles but not the circles of 30% and above, components must be dehumidified according to the conditions of bullet (5);
  - c. If color changes on 10%, 20%, and 30% circle or above, the product should be returned to the supplier for high temperature dehumidification;
- (3). After bag opened, manual soldering or reflow process must follow the following requirements:
  - a. Complete soldering / reflow within 12 hours;
  - b. Requirements of working environment: Temperature<30°C, Humidity<60%RH;
- (4). If the working condition is outside (3)a requirement, the components must be dehumidified according to the conditions of bullet (5);
- (5). Low temperature dehumidification: temperature 60±5 °C, at least 24 hours;
- (6). Shelf life: 30 days. If it's over 30 days from the production date on the package label, the components must be dehumidified according to the condition of bullet (5). If customer is unable to dehumidify, return components to LIGHT for dehumidification.

#### 2. Peak Forward Current:

Condition for is IFP pulse: Pulse Width \( \le 0.1 \) ms and duty \( \le 1/10. \)

#### 3. Caution in ESD:

Static Electricity and surge damages the LED. It is recommend to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Part No.	SL-T3535RGBC020-L95	Page	3 of 9





### **Electrical Optical Characteristics at Ta=25℃**

Parameter	Symbol	Color	Min.	Typ.	Max.	Unit	Test Condition
		Red	780		1000	mcd	I <sub>F</sub> =20mA
Luminous Intensity	Iv	Green	1000		1300	mcd	I <sub>F</sub> =20mA
		Blue	350		460	mcd	$I_F=20mA$
Viewing Angle	$2\theta_{1/2}$			120		Deg.	(Note 2)
		Red		635		nm	I <sub>F</sub> =20mA
Peak Emission Wavelength	λр	Green		515		nm	I <sub>F</sub> =20mA
		Blue		465		nm	I <sub>F</sub> =20mA
		Red	620		625	nm	I <sub>F</sub> =20mA
Dominant Wavelength	λd	Green	518		523	nm	$I_F=20mA$
		Blue	470		475	nm	$I_F=20mA$
		Red		15		nm	I <sub>F</sub> =20mA
Spectral Line Half-Width	Δλ	Green		30		nm	I <sub>F</sub> =20mA
		Blue		30		nm	I <sub>F</sub> =20mA
		Red	1.8		2.2	V	I <sub>F</sub> =20mA
Forward Voltage	$V_{\mathrm{F}}$	Green	3.0		3.4	V	I <sub>F</sub> =20mA
		Blue	3.0		3.4	V	I <sub>F</sub> =20mA
Reverse Current	$I_R$				10	μA	V <sub>R</sub> =5V

#### **Note:**

- 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve. Tolerance of Luminous Intensity:  $\pm 15\%$ .
- 2.  $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3. The dominant wavelength,  $\lambda d$  is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device. Tolerance of Dominant Wavelength:  $\pm 1.0$ nm.
- 4. Tolerance of Forward Voltage: ±0.1V.





### **Bin Code List**

Red				
Bin Code	12	13		
发光强度(mcd)	780-1000	780-1000		
Bin Code	<b>A2</b>	B2		
电压(V)	1.8-2.0	2.0-2.2		

Green				
Bin Code	14	15		
发光强度(mcd)	1000-1300	1000-1300		
Bin Code	G2	H2		
电压(V)	3.0-3.2	3.2-3.4		

Blue				
Bin Code	16	17		
发光强度(mcd)	350-460	350-460		
Bin Code	F2	G2		
电压(V)	3.0-3.2	3.2-3.4		

#### **Note:**

- 1. Tolerance of Luminous Intensity:  $\pm 15\%$ .
- 2. Tolerance of Forward Voltage:  $\pm 0.1$ V.


Part No. SL-T3535RGBC020-L95	Page	5 of 9
------------------------------	------	--------








## **Typical Electrical / Optical Characteristics Curves**


(25°C Ambient Temperature Unless Otherwise Noted)

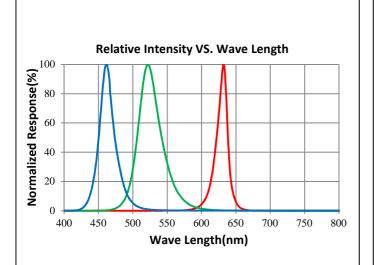

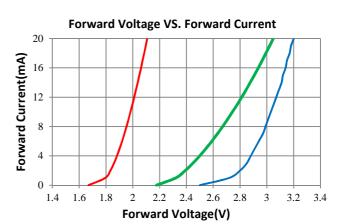

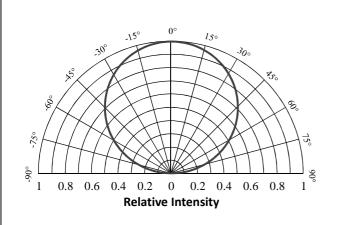

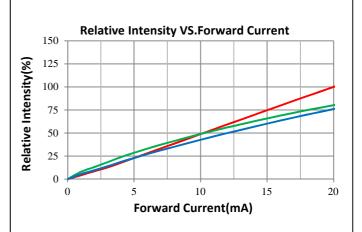

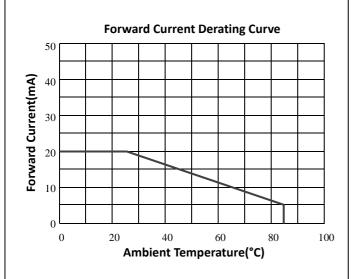

Part No.	SL-T3535RGBC020-L95	Page	6 of 9
----------	---------------------	------	--------





### **Label Explanation**


#### LIGHT Universal Label



#### Customer Defined Label



#### **Reel Dimensions**

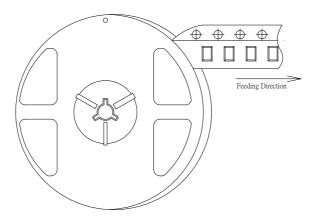


**Note:** Tolerance unless mentioned is  $\pm 0.2$ mm; Unit = mm

Part No.	SL-T3535RGBC020-L95	Page	7 of 9
----------	---------------------	------	--------






## **Carrier Tape Specifications**

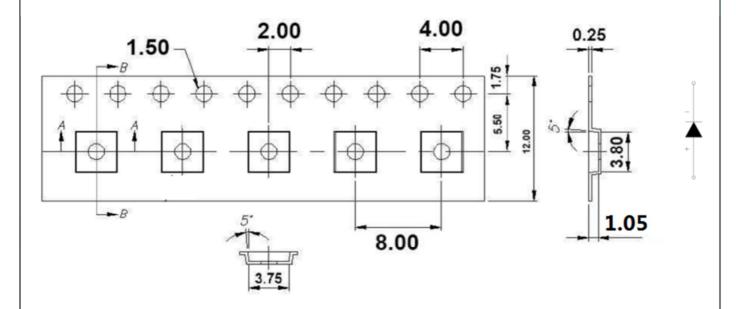

## Moisture Resistant Packaging

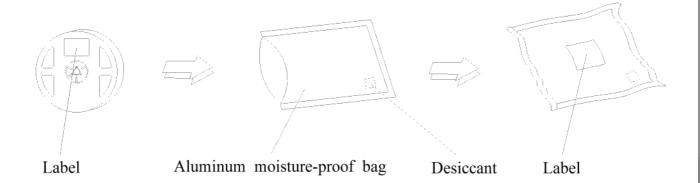


	Part No.	SL-T3535RGBC020-L95	Page	8 of 9
н	1 221 2 1 1 0 2	22 1000011020020	5	0 01 7





### Suggest IR Reflow Condition For Lead Free

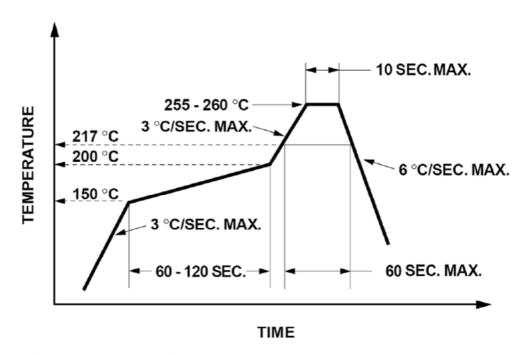


- 1. Reflow soldering should not be done more than two times.
- 2. When soldering, do not put stress on the LEDs during heating.

#### Soldering iron

- 1. When hand soldering, the temperature of the iron must less than 300°C for 3 seconds.
- 2. The hand solder should be done only once.

## Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of LEDs will or will not be damaged by repairing.

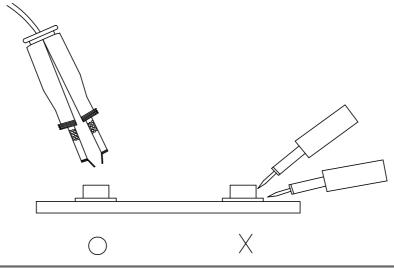

Part No.	SL-T3535RGBC020-L95	Page	9 of 9
		_ =	